



# Micro OhmMeter RMO600

- Lightweight - only 8 kg
- Powerful 5 A - 600 A DC
- Measuring range 0 - 999 mΩ
- Max. resolution 0,1 μΩ
- SINGLE / CONT Mode
- Mechanical protection IP54



## High DC current resistance meter

### Description

RMO600 is a micro-ohmmeter based on state of the art technology, using the most advanced switch mode technique available today. RMO600 generates true DC current with automatically regulated test ramps. During the test RMO600 ramps with increasing current before measuring and decreasing current after the measurement. This eliminates magnetic transients. After the test current has been set, the automatic test procedure is started by pressing the Ω-button.

There is enough memory in RMO600 to store 100 measurements. All measurements are time and date stamped. They can be printed on a external thermal printer using the PRINT menu. The results can be also exported to a PC with RMO-Win software. The software connects a PC to RMO600 using a RS232 cable. Using RMOWin the result can be printed like an Excel table which later can be shown as a diagram and used for a report.

The set is equipped with thermal and overcurrent protection. RMO600 has very high ability to cancel electrostatic and electromagnetic interference in high HV electric fields. It is achieved by very efficient filtration. The filtration is made utilizing appropriate hardware and software.

### Output Ratings

The full output is available from the RMO600 at 230V Mains Supply. A reduced output is available from lower supply voltages.

Supply Voltage	Output Current	Full Load Voltage
230 V AC	600 A DC smoothed	5,0 V DC
	300 A DC smoothed	6,0 V DC
115 V AC	600 A DC smoothed	3,0 V DC
	300 A DC smoothed	5,0 V DC

Output current is filtered and has a ripple of less then 1%.

### CONT Mode

RMO600 can generate DC current continuously using the CONT menu. In this menu the current can be chosen the same way like in the SINGLE menu, but the duration of the test can be preset. The test is started pressing the Ω-button. During the test, a new result is shown on the display and stored into the PC (RMOWin) each second. Using RMOWin the result can be printed like an Excel table which later can be shown as a diagram and used for a report.


## Application

Typical application is measuring resistance of:

- ✓ high, middle and low voltage circuit breakers
- ✓ high, middle and low voltage disconnecting switches
- ✓ high-current bus bar joints
- ✓ cable splices
- ✓ welding joints


## Standard accessories

- ✓ Current cables 2 x 5m 50mm<sup>2</sup> with battery clips
- ✓ Sense cables 2 x 5m 2,5mm<sup>2</sup> with alligator clips
- ✓ RMO-Win PC software including RS232 cable
- ✓ Mains power cable
- ✓ Ground (PE) cable
- ✓ Transport bags

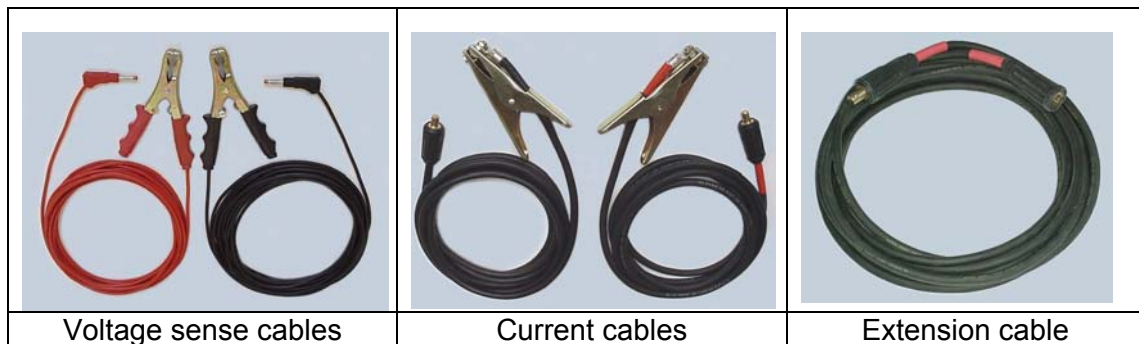

## Optional accessories

- ✓ Remote control unit
- ✓ Kelvin probes
- ✓ Transport case
- ✓ Test shunt 100μΩ
- ✓ Current cables 2 x 5m 70mm<sup>2</sup>
- ✓ Current cables 2 x 10m 70mm<sup>2</sup>
- ✓ Current cables 2 x 15m 70mm<sup>2</sup>
- ✓ Current cables 2 x 15m 95mm<sup>2</sup>
- ✓ Extension cable 1 x 5m 70mm<sup>2</sup>
- ✓ Extension cable 1 x 10m 70mm<sup>2</sup>
- ✓ Sense cables 2 x 10m 2,5mm<sup>2</sup> with alligator clips
- ✓ Sense cables 2 x 15m 2,5mm<sup>2</sup> with alligator clips

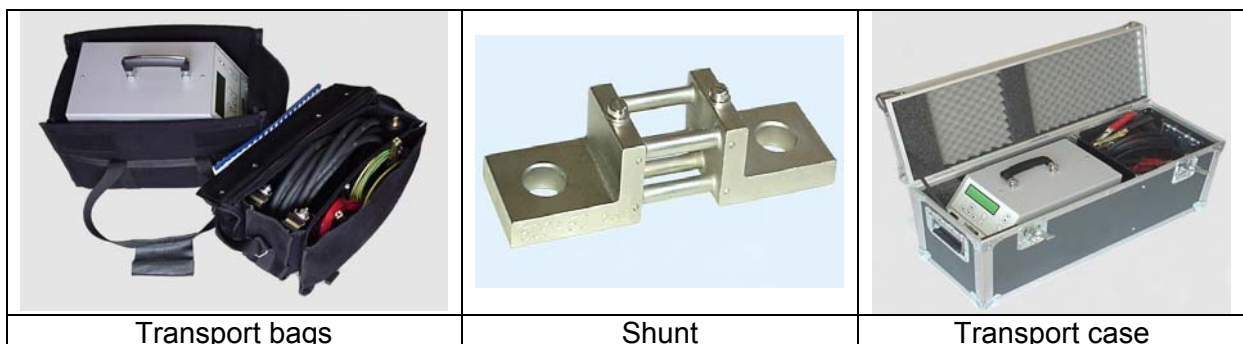

## Connecting a Test Object to RMO600


With RMO600 turned off, connect RMO600 to the test object ( $R_x$ ) in such a way that the measuring cables from the "Voltage Sense" sockets are attached as close as possible to  $R_x$ , and in between the current feeding cables. That way, resistance of both cables and clamps is almost completely excluded from the resistance measurement.



## Remote Control Unit

The RMO Remote Control Unit is an optional control unit that is used to start and stop the tests from a remote location, away from the actual RMO.

Provided that, for a series of tests, the same test current is fed through the test object, multiple measurements can be carried out with the RMO Remote Control Unit.

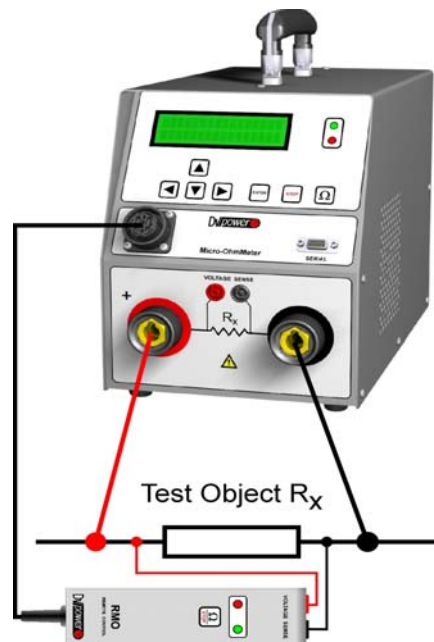

## Kelvin Probes



Kelvin Probes provide easy and simple testing. Current and voltage connections where joined inside single cable having thus no need to use heavy current cables.

Measurement is performed by 20 A current. In case higher current is given RMO will limit it to value of 25 A maximally.

## Technical data

### 1 - Mains Power Supply

- Connection according to IEC/EN60320-1; UL498, CSA 22.2
- Voltage single phase 110 - 240V AC, +10% - -15%
- Frequency 50/60 Hz

### 2 - Output data

- Test current 5A - 600A DC
- Measuring range / Resolution
  - 0,1  $\mu\Omega$  - 99,9 $\mu\Omega$  0,1  $\mu\Omega$
  - 100 - 999 $\mu\Omega$  1  $\mu\Omega$
  - 1,000 m $\Omega$  - 9,99m $\Omega$  10  $\mu\Omega$
  - 10,00 m $\Omega$  - 99,9m $\Omega$  0,1m $\Omega$
  - 100,0m $\Omega$  - 999m $\Omega$  1m $\Omega$
- Typical accuracy  $\pm 0,25\%$  rdg  $\pm 0,25\%$  FS

### 3 - Environment conditions

- Operating temperature  $-10^{\circ}$  -  $+50^{\circ}$  C /  $14^{\circ}$  F -  $+122^{\circ}$  F
- Storage and transportation  $-25^{\circ}$  -  $+70^{\circ}$  C /  $-13^{\circ}$  F -  $+158^{\circ}$  F
- Humidity 5 - 95% relative humidity, non condensing

### 4 - Dimensions and Weight

- Dimensions 198 x 255 x 380 mm  
7,8 x 10 x 15 in  
(W x H x D) without handle
- Weight 8 kg/17,5 lb

### 5- Safety Standards

- European standards EN 61010-1
- International standards IEC 61010-1  
UL 3111-1  
CAN/CSA-C22.2 No 1010.1-92

### 6 - Electromagnetic Compatibility (EMC)

- CE conformity EMC standard 89/336/EEC
- Emission EN 50081-2, EN 61000-3-2/3
- Interference Immunity EN 50082-2

Specifications are subject to change without notice.

