

LITE 3000E

Description of basic product

features

- Fast troubleshooting
- Simultaneous monitoring in both directions of 2 Mbit/s PCM lines
- Powerful testing of framed Nx64 kbit/s and unframed 2 Mbit/s PCM systems
- Advanced all-layer signalling analysis options
- ISDN call emulation options
- Data interface test options
- Frame relay test option
- Memory Expansion (100 Mbyte) option
- Immediate LED indications
- Large colour display
- Battery-powered, with more than 10 hours between recharges



General description

The NetTest LITE 3000E is a hand-held, battery-powered, multipurpose telecommunications test instrument for 2048 kbit/s PCM systems. The instrument is a powerful tool for a wide range of applications, from fast first aid troubleshooting to comprehensive, in-depth analysis of transmission and signalling problems. Adding options converts the LITE 3000E from a full-featured transmission line quality tester into an advanced signalling analyser.

The basic LITE 3000E, with its two independent receivers and one transmitter, supports framed and unframed testing and monitoring. The instrument is thus ideal for both in-service and out-of-service transmission-quality measurement. For fast troubleshooting, the LITE 3000E displays alarms and transmission link status on LED indicators. The instrument's two inputs permit immediate monitoring of the two sides of a PCM line and allow comparison of simultaneously recorded results.

With options added, the LITE 3000E tests data interfaces, frame relay circuits, ISDN access lines and the A-bis interface of GSM networks. Yet other options turn the LITE 3000E into a very powerful signalling analyser for SS7 and ISDN protocols and for CAS and MF signalling.

Results are easily read from the large display. Colours and graphical symbols facilitate interpretation. Measurement data can be printed on an external printer or exported to a PC via the V.24 interface. With its few keys and large colour LCD screen, the LITE 3000E is very user-friendly in operation. It can be operated remotely through an optional MS Windows® program that simulates the instrument's front panel. The LITE 3000E can automatically

configure to the received signal, eliminating time-consuming instrument set-up. Set-ups supporting particular applications may be stored in the instrument. Set-ups can also be transferred to a PC from where they can be loaded to other instruments, allowing a very fast and easy distribution of standardised test set-ups within the organisation.


Fault location is greatly facilitated by the high degree of portability of the robust LITE 3000E, allowing measurements to be taken at any suitable measuring point. The instrument is powered by rechargeable and replaceable intelligent high-capacity NiMH batteries, which provide more than 10 hours of operation between recharges with PowerSave. The LITE 3000E can also be powered via an external mains adapter for long-term measurements.

Measurement

The LITE 3000 E has three measurement functions:


The **status monitor** is always active and provides essential information for fast troubleshooting of the monitored transmission system. Status monitoring covers:

- Line alarms on LED indicators with a trap facility
- Display of current input frequency and deviation
- Indication of input level
- Traffic channel usage
- Audio level in a traffic channel
- Propagation time monitor
- Listen-in on a traffic channel

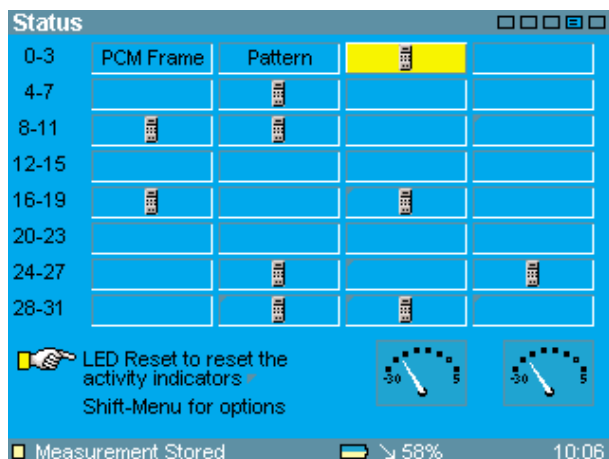

Fast overview of traffic channel time slots

Interval-based measurement provides information for transmission-error performance for installation/commissioning and troubleshooting. Information on errors and alarms is collected for intervals with a user-defined duration and error-performance parameters (G.821/G.826/M.2100) are calculated. A Measurement Summary function provides a very fast overview of a measurement via an “OK/Questionable/not-OK” indication. The user can define thresholds for the “OK” and the “not OK” levels. Histogram presentations facilitate the tracing of errors.

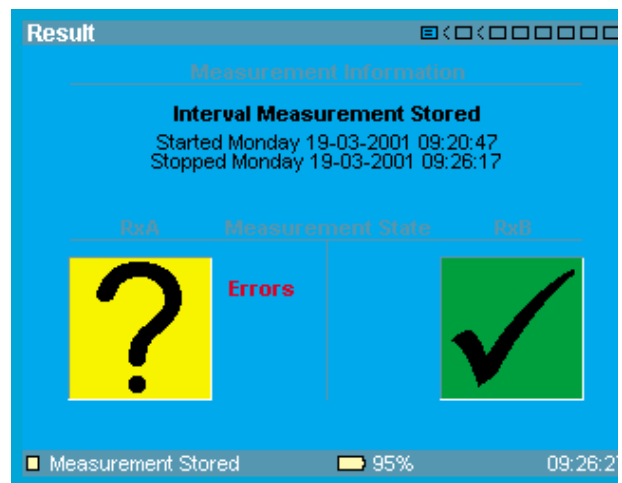

The “OK/Questionable/ not-OK” measurement indication

Log-based measurements are available for signalling analysis and advanced transmission-error troubleshooting. Events are logged in the memory with high-resolution time stamps. Logged events are detected alarms, errors, CAS bit changes, Sa bit changes and, depending on the options added, a number of other events types such as GSM, SS7 and ISDN signalling messages. This allows the user to examine the correlation of the different types of events. Filters enable/disable the logging and display of individual events for optimal memory usage and read-out of only the information required. The event log can be examined during or after a measurement.

Long-term measurements with high resolution or otherwise requiring very large data storage are possible when the Memory Expansion option is installed in the LITE 3000E. The extra 100 Mbytes of non-volatile data storage provides the instrument a huge built-in memory capacity, unrivalled in its class.


Typical applications

Comprehensive out-of-service testing

The LITE 3000E supports unframed 2048 kbit/s testing for installation, commissioning and stability tests. Performance of system under test is evaluated on the basis of BER measurements with a loop back at the far end of the tested line.

Framed 2 Mbit/s testing

The LITE 3000E can simulate errors for testing system behaviour on variations in a framed signal as a part of installation testing and conformance testing. The synchronisation circuits are tested by generating errors in the frame alignment signals. CRC-4 can be calculated and inserted in the PCM frame. Relevant alarms can be generated. Analogue tones or digital signals may be inserted into a channel in the PCM signal.

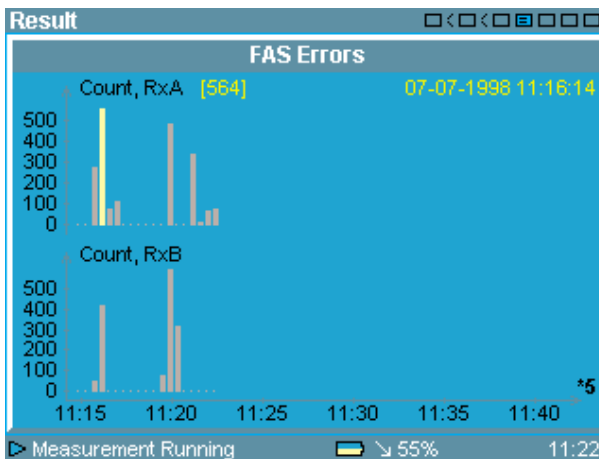


Graphical histogram presentation of a detected error

In-service monitoring

In troubleshooting, it is of utmost importance to be able to easily and quickly determine the state of the PCM lines in a network. The LITE 3000E's two receivers permit simultaneous monitoring of both sides of a PCM line. The Line Status LEDs

present the current status in relation to alarms and errors. A trap facility saves information on earlier alarms and errors, permitting detection of sporadic errors and allowing unattended operation. A PCM level indicator provides information on the current level of the monitored PCM signal, making it easy to verify that the expected signal level is present.

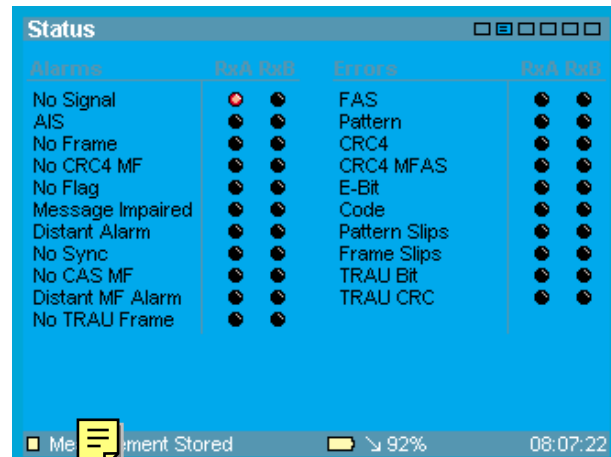

Detailed information on errors and alarms is shown in the display

In-service error-performance measurement

FAS and CRC-4 based error measurements are often used for in-service verification of transmission quality. With the LITE 3000E, it is easy to obtain this information, including G.821, G.826 or M.2100 error-performance parameters.

Identification of synchronisation problems

To eliminate errors, the network elements in modern telecommunications networks are synchronised to a single clock. Synchronisation faults result in transmission errors caused by bit or frame slips in the network. It is easy to identify synchronisation problems with the LITE 3000E. The instrument highlights the occurrence of bit and frame slips to the user and displays the frequency deviation between the two inputs. A deviation indicates that two network elements are synchronised to different clocks; i.e. that one of them is mis-synchronised.

Slip measurements

Slip may be caused by fading on digital radio link; transmission through digital switches or error bursts corrupting too many justification bits. As a result, one or more bits are inserted or deleted from the signal. The LITE 3000E records slips and bit errors separately.

Traffic monitoring


The LITE 3000E analyses the content of the traffic channels in the monitored lines, using this data to present an easy-to-understand survey of the current channel states (busy/idle). This can be used to ensure that all channels are idle before the line is taken out of service. In addition, a lock facility identifies channels with an abnormal usage (always/never busy).

Propagation time

Propagation time can be measured when the instrument sends out a PRBS and the pattern is looped back to the instrument, thus permitting checks of the controllers for the signal routing, satellite links etc. and that introduced delays are below specified limits.

Advanced in-service troubleshooting

Troubleshooting transmission errors may require analysis of timing between events, which occur within a few milliseconds. The LITE 3000E's high-resolution log facilitates analysis of timing between errors or alarms.

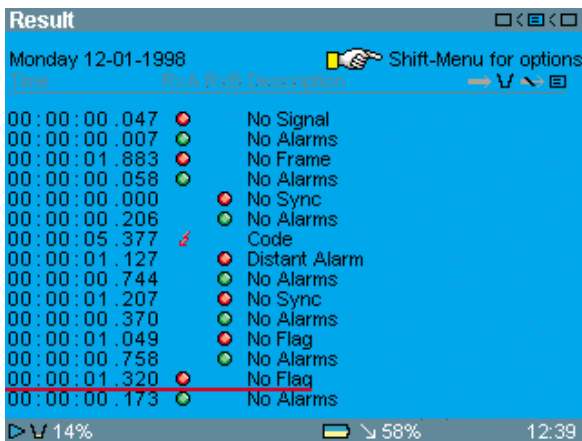

Time	RxA	RxB	Description
00:00:00.047			No Signal
00:00:00.007			No Alarms
00:00:01.883			No Frame
00:00:00.058			No Alarms
00:00:00.000			No Sync
00:00:00.206			No Alarms
00:00:05.377			Code
00:00:01.127			Distant Alarm
00:00:00.744			No Alarms
00:00:01.207			No Sync
00:00:00.370			No Alarms
00:00:01.049			No Flag
00:00:00.758			No Alarms
00:00:01.320			No Flag
00:00:00.173			No Alarms

Log of errors and alarms with high-resolution time stamps

In-service testing (drop-and-insert)

A full error-performance analysis is based on a PRBS pattern located in one or more channels. Channels within a 2048 kbit/s link can be tested using the drop-and-insert function. If the tested channel is looped back, the LITE 3000E can test loop performance and propagation time. It is also possible to insert errors in a live traffic signal. Thus, handling of errors in signals with a special format can be checked.

Audio performance test

Audio checks of the digital side of the multiplexer identify impaired voice channels. The audio information in a channel may be output to the built-in loudspeaker, to a headset (option) or to external equipment for further analysis.

Analogue multiplex testing

The LITE 3000E can insert a tone into a channel to measure its audio level for the test of D/A-converters. If the channel carries a single tone, the frequency can also be measured.

Specifications

PCM line interfaces

Generally complying with ITU-T Rec. G.703.

Unbalanced plug: 1.6/5.6 or BNC.

Balanced plug: BNO.

Configuration of interfaces: One transmitter (Tx) and two receivers (RxA-RxB).

Transmitter and receivers can be set independently or locked together.

Transmitter (Tx)

Bit rate: 2048 kbit/s.

Adjustable offsets: ± 125 ppm in 1-ppm steps.

Clock source: Internal, recovered from RxA or RxB or external 2 MHz TTL signal.

Internal clock: 2048 kbit/s ± 5 ppm.

Line code: HDB3, AMI.

Impedance: 75 Ohms unbalanced, 120 Ohms balanced.

Test patterns

PRBS11, PRBS15, PRBS23, all 0's, all 1's,

alternate 1:1, alternate 3:24 normal or inverted.

User-defined 1, 2, 4, 8 or 16-bit.

Signal insertion

Test patterns or fixed values are injected in nx64 kbit/s channels (framed) or as an unframed signal.

Tone in one speech channel:

- Frequency: 1 Hz to 4 kHz in 1 Hz steps
 - Level: +3 dBm to -70 dBm in 1 dBm steps
- CAS signalling bits.

Sa-bits (non-FAS).

Alarms (manual insertion): No signal, AIS, No Frame, Distant, No MF, Distant MF.

Error insertion: Bit, code, FAS bit, FAS word, CRC-4, CRC-4 MFAS, CAS MFAS, E-bit.

- Manual: 1-255 consecutive errors (1-16 consecutive FAS word errors)
- Continuous 10-2, 10-3, 10-4, 10-5, 10-6, 10-7
- Provoking of G.821, G.826 or M.2100 events (ES, SES etc.) (Bit, FAS, CRC-4, E-bit)

Manual slip insertion: Frame slip, pattern slip.

Clock out

A 2 MHz TTL output, synchronised to the 2 Mbit/s clock rate of RxA or RxB.

Receivers (RxA-RxB)

Bit rate: 2048 kbit/s \pm 100 ppm.

Line code: HDB3, AMI.

Impedance: 75 Ohms unbalanced, 120 Ohms balanced or high (approx. 10 * nominal).

Sensitivity: 0 to 40 dB cable attenuation (normal) or 20 to 30 dB linear attenuation (monitor).

Jitter tolerance: In accordance with ITU-T G.823 section 3.1.1.

Return loss: Complies with ITU-T Rec. G.703.

Auto configuration: Input, line code, framing and pattern are automatically determined. Signalling channels are identified if signalling options are installed.

Measurements

Either interval-based or log-based measurement can be activated.

Interval-based measurement

- User-defined interval length: 5, 10, 15, 30s, 1, 5, 15, 30 min, 1, 2, 4, 6, 12 hour
- Information logged per interval:
 - Alarms
 - Code error count/ratio
 - FAS, CRC-4, E-bit and bit-error count/ratio and G.821, G.826 or M.2100 parameters

Log-based measurements

Events are logged with 1 msec resolution time stamps. Time stamps are absolute, relative to start or relative to previous.

- Logged events: Detected alarms and errors
- Changes in CAS and Sa bits
- Filters enable/disable the logging of individual events

Test patterns: Same as transmitter.

Detected signals

Test patterns or fixed values are detected in nx64 kbit/s channels (framed) or as an unframed signal.

Tone in one speech channel:

- Frequency: 1 Hz to 4 kHz with 1 Hz resolution
- Level: +3 dBm to -70 dBm with 1 dBm resolution

Alarms and errors

Alarms: No signal, AIS, No Frame, Distant Alarm, Signalling Alarm (No MF, Distant MF Alarm, Message impaired, No Flag).

Errors: Bit, code, FAS, CRC-4, CRC-4 MFAS, E-bit, frame slip, pattern slip.

Error performance

G.821, G.826 or M.2100 analysis of a PRBS in the received signal, or based on CRC-4, E-bit or FAS. ES, SES, DM (G.821), BBE (G.826), UAT, EFS, AT % or count.

Error performance evaluation for the total measurement: HR% for a user-defined error performance parameter or programmable OK and not-OK limits for Bit, FAS, CRC-4 or E-bit count or ratio.

Time-slot monitoring

Contents of single time slot, FAS, NONFAS, CAS signalling. Level and frequency for encoded tone.

Speech decode

64 kbit/s (ITU-T Rec. G.703): A-law according to ITU-T Rec. G.711.

Frequency deviation indication

Accuracy: – 1 ppm.

Input level indication

Range: 0 to -46 dB (normal) or - 20 to -32 dB (monitor).

Propagation time

Resolution: 1 µsec (unframed), 0.1 msec framed.

Range: 0 - 4 sec.

Drop-and-insert

Permits the user to insert an nx64 kbit/s test pattern in an incoming signal and send it out through the transmitter. It is also possible to insert errors in a selected 64 kbit/s traffic channel.

ADPCM speech decode option

ADPCM in 32 kbit/s subchannels in accordance with ITU-T Rec. G.721 and G.761.

Storage capacity

Memory size: 640 kbytes (equals more than 20,000 signalling messages with an average message length of 20 bytes or up to 7,500 measurement intervals). Continuous or stop-on-full operation is user-selectable. The memory is non-volatile. Up to 10 measurements can be stored.

Memory Expansion (option)

Extends the total memory capacity of the instrument to 100 Mbytes.

Time stamps

Resolution: 1 msec.

Real-time clock

Battery-backed; for event time stamps etc.

Built-in loudspeaker

The built-in loudspeaker monitors speech in both directions of a voice channel.

Output level: User-controlled from front panel.

A jack provides headset access to the audio signal. The built-in loudspeaker is disconnected when a headset is plugged in.

A nominal level (at 600 Ohms load) can be provided through the jack for connection to an external test set.

Printer/remote control

V.24/RS-232C. Male DE-9 connector.

Display

Backlit colour LCD with 320 x 240 pixels.

Battery

10.8 V rechargeable and replaceable intelligent NiMH battery.

Operating time:

- With PowerSave; more than 10 hours
- Without PowerSave; more than 6 hours

Fast charge: Approx. 3 hours.

Normal charge: Approx. 6 hours.

Indicator for remaining capacity: % and hours/minutes.

Mains adapter

Input: 120-240 V AC, 50-60 Hz.

Output: 18 V DC, max. 2.5 A.

Mechanical

Dimensions: Approx. 21 x 24 x 8.5 cm (HxWxD).

Weight: Approx. 3 kg.

Environmental

Operating temperature: -5°C to +40°C.

Storage temperature: -25°C to +60°C.

The LITE 3000E is CE-marked and complies with EN 50081-1 and EN 50082-1.

Standard accessories

- User's Guide
- NiMH battery
- Mains adapter with mains cable
- Instrument carrying strap

Options

- Basic A-bis interface and protocol functionality
- A-bis protocols (basic A-bis interface and protocol functionality option required)
- Basic SS7 protocol functionality
- SS7 protocols (basic SS7 protocol functionality option required)
- Basic ISDN protocol functionality
- ISDN protocols (basic ISDN protocol functionality option required)
- ISDN call emulation (basic ISDN protocol functionality option required)
- ISDN Basic Rate interface
- Data interface measurements
- Frame relay test option
- MF tone detection and CAS bit decode
- CAS signalling tables (MF tone detection and CAS bit decode option required)
- ADPCM speech decode
- FrontSim: Remote operation (front simulation) SW for MS Windows®
- Memory Expansion (100Mbyte) option
- Clock in/clock out converter cable
- Carrying case
- Carrying soft bag
- Hardware manual
- Extended warranty
- Accredited calibration
- Extra NiMH battery
- Stand-alone charger for battery
- Headset
- Measurement cables

NetTest A/S

Kirkebjerg Allé 90 DK-2605 Brøndby Denmark
Tel +72 11 22 00 Fax +45 72 11 22 10
E-mail: com@nettest.com
Web: www.nettest.com

NetTest Sales Offices

Australia +61 39 890 6677
Brazil +55 11 5505 6688
Canada +1 905 479 8090
China +86 10 64 67 98 88
France +33 1 30 08 88 88
Germany +49 89 99 89 010
Italy +39 02 95 12 621
Mexico +52 5557 8248
Nordic +45 72 11 23 00
Singapore +65 220 9575
Spain +34 91 372 92 27
Sweden +46 8 555 410 65
UK +44 1883 349110
USA +1 508 435 3800

NetTest is a leading worldwide provider of testing, monitoring and management systems across both the optical and network layers of communications networks. NetTest provides network operators, network equipment manufacturers, component manufacturers and enterprise service providers with the network testing solutions they need. These solutions troubleshoot and optimise performance in today's most complex and hybrid networks, as well as those planned for tomorrow.

NetTest undertakes a continuous and intensive product development programme to ensure that its instruments and systems perform to the highest technical standards. As a result, the specifications in this document are subject to change without notice.

ISO 9001 certified.
NetTest A/S. All Rights Reserved.